



Product description:

Semi-glossy oil paint of the air-dry alkyd type, with good coverage and good adhesion, is used for protection and painting inside and outside the building. This product has fluidity, glossiness and proper drying and can be used with the same coating without the need to mix alkyd matte and gloss paint. This color is resistant to yellowing and moisture.

Application:

Alkyd bases for creating different colors in computer devices E-tints are used and it is possible to create thousands of shades by using them. Desired is provided by the device, so that by adding Pigment paste in a certain range, can be converted into various colors they will be.

Technical data:

ALKYD PAINT – SEMI-GLOSSY ALKYD TOP PAINT (ASG-100)

| Specification | Details | EN Standard | ASTM Standard |
|-------------------------------|------------------------------|------------------------|---------------|
| Film Former/ Binder | white & color | | |
| Solids by Volume % | up to 65% | EN ISO 3233-1 / 3233-2 | D2697 |
| Fineness of Grind | Maximum 20 microns | EN ISO 1524 | D1210 |
| Viscosity KU / cP | 90-110 KU | EN ISO 2555 | D562 / D2196 |
| Density g/cm ³ | 90 - 105 KU | EN ISO 2811 | D1475 |
| VOC / Volatile Substances g/L | 2/1 - 4/1 gr/cm ³ | EN ISO 11890 | D3960 |
| Surface Drying / Touch Dry | Maximum 35% by weight | EN ISO 9117-3 | D1640 |
| Through Dry / Deep Drying | Maximum 16 hours | EN ISO 9117-1 | D1640 |

Environmental Conditions:

This product can be run at 5 - 35°C on dry place.

Equipment Used:

Can be used with a brush, paint sprayer and roller.

Surface Preparation:

The surface should be clean, dry and free from any contamination. Fresh gypsum surfaces usually do not require preparation, but old and old surfaces should be primed.

Method of Applying:

- You can hit the surface if needed.
- Then the item product Dilute the solution with suitable thinner and apply with suitable equipment be made.

Safety Tips:

This coating is flammable and should be away from flame and heat and also the executor is obliged to observe the MSDS conditions of the product.

Storage Conditions:


This product should be in a closed space and away from direct rays. The temperature should be kept at 5 - 35 degrees Celsius.

packing:

- 1 Litr (Metal can)
- 4 Litr (Metal can)
- 20 Litr (Metal can)

Considerations:

The available information is based on our technical knowledge and laboratory research, but since the conditions and methods of application are different and out of reach, we do not guarantee the results of it.

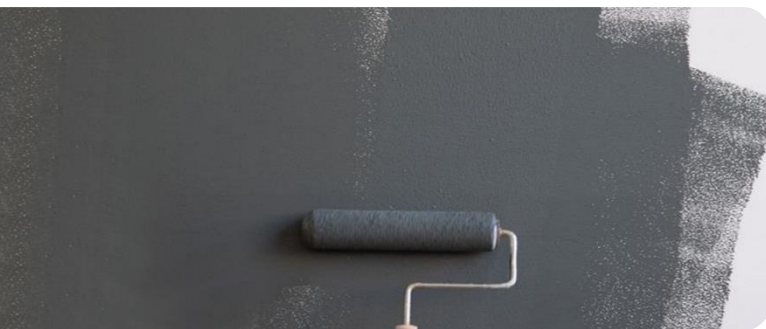

LEGAL NOTES : : The information contained in this Technical Data Sheet is based on laboratory testing and practical experience. Actual performance may vary depending on substrate condition, application method, and environmental conditions. Users should test suitability before large-scale application.

Head Office : Building No.15 , Qasimlu Street 40, Shahidan Zargata Quarter 24, Zone 1, Sulaymaniyah 46001, Iraq

Factory : Tanjaro Industrial Area – Sulaymaniyah – Iraq