



Performance Enhancing Cement Grinding Aid

Description:

GA 1010 is a high-performance grinding aid and performance enhancer specifically engineered for use in ball mill cement grinding systems. Its optimized organic formulation improves the efficiency of the grinding media, reduces agglomeration of fine particles, enhances material flowability inside the mill, and minimizes coating on grinding media and mill internals.

Technical Properties:

Chemical Base	Amine blend mixture
Appearance	Homogeneous Liquid
Color	Brown
pH	9 ±1
Density (20 °C)	1,06 ± 0,02 (g/cm3)
Chloride content	< 0,01

Application :

GA 1010 should be directly added to the mill or conveyor belt during the grinding process using an adjustable dosing pump.

Advantage :

- Increases dispersion and grinding efficiency.
- Provide improved powder flowability within the mill.
- Provides higher mill output and lower kWh/ton consumption.
- Reduces cement production costs.
- Grinding aids neutralizes conglomeration forces.
- Increases cement flowability by decreasing the agglomeration of cement particles.
- Desired cement fineness is obtained at a shorter time.
- Achieves self-placement of cement in the silos.
- Reducing the CO2 emission as a result of reducing energy consumption for the grinding process.

Health and Safety Information:

The additive must be kept away from the skin and eyes. In case of any contact, it must be washed with water. When contacted with eyes one must immediately rinse it with water and medical support must be taken. Protective goggles / gloves / mask should be used during the usage of the additive. The Safety Data Sheet (SDS) should be read for detailed information.


Dosage:

Recommended dosage range: 0.05% – 0.08% by weight of cement (500–800 g/ton).

The optimal dosage should be determined through laboratory and industrial mill trials, based on clinker properties, mill settings, and target fineness.

Storage:

Must be stored at temperatures between +5°C and +35°C. Direct sunlight exposure and freezing conditions should be avoided. Once frozen, the product should be thawed out slowly and re-mixed thoroughly prior to use. Under proper storing conditions, the product's shelf life is 12 months from production date if keep in original packaging unopened and undamaged.

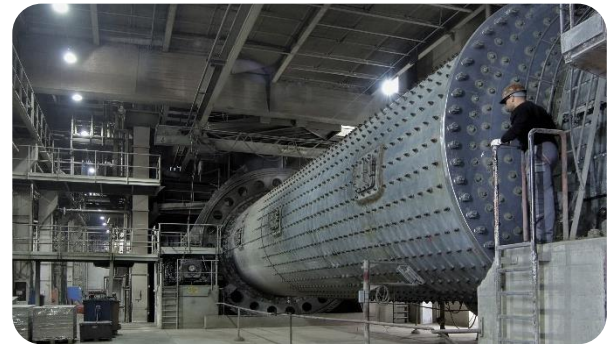

Standards compliance:

Complies with ASTM C465.

Cleaning :

In case of a possible spill or contamination, it can be washed with clean cold water.

Packaging : 1000 kg IBC konteyner Bulk

Fire : GA 1010 non-flammable

